

RG1000LBXD




10 IN 1 OUT + RESET CONTROL UNIT

Control unit for gas leakage sensors with alarm buzzer; input for up to 10 remote 230V~ powered sensors (1). Reset and test pushbuttons and acoustic alarm. For non-classified ATEX zones.

TECHNICAL FEATURES

Power supply	230V~ ±10% 50Hz
Battery	12V ±10%
Output (relay)	5(1)A @ 250V~ SPDT
active/prealarm/alarm	Green/red/red LED
Delay on e.v. relay	>20 sec.
Button 1	Test
Button 2	Reset
Case	6 modules for DIN-rail
IP rating	IP54
Dimensions	H90 W105 D70mm

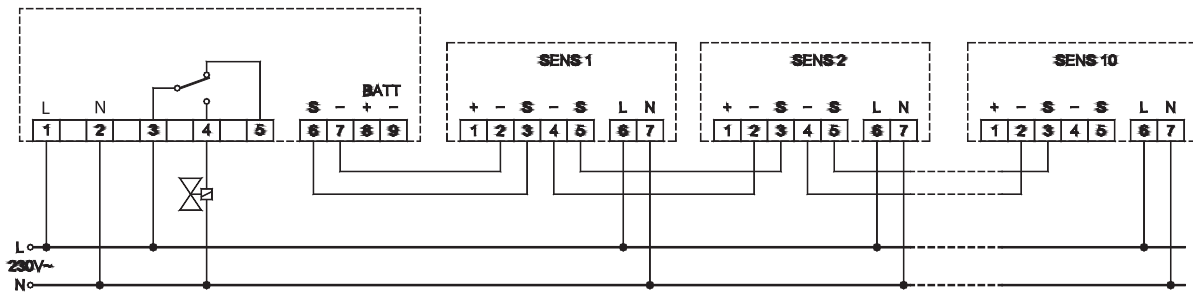

- Notes: (1) The remote sensors used are: **SGAMET, SGAGPL, SGIME1, SGIGP1, SGIME1M, SGIGP1M.**
 (2) The back-up battery to be used is ACCSGB12.

RG1000MBX2




2 IN 2 OUT DIN RAIL MOUNT BASIC CONTROL UNIT

Control unit for gas leakage sensors in 3 module DIN-rail case, with two relay outputs, inputs for 2 remote sensors (1) and for back-up battery (ACCSGB12). Test and reset buttons. For Non-classified ATEX zones.

TECHNICAL FEATURES

Power supply	230V~ -15/+10% 50Hz
Output 1 (relay x e.v.)	4(2)A @ 250V~ SPDT
Output 2 (relay x alarm)	4(2)A @ 250V~ SPST
Indicators: active/alarm1/alarm2	Green/red/red LED
Delay on e.v. relay	~15 sec.
Push buttons	Test/reset
Case	3 modules for DIN-rail
IP rating	IP30
Dimensions	H96 W53 D73mm

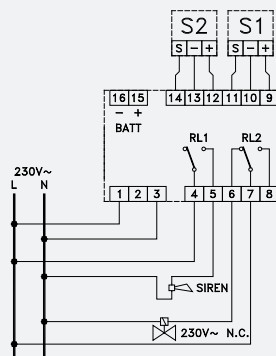

- Notes: (1) The remote sensors used are: **SGAMET, SGAGPL, SGIME1, SGI-GP1, SGIME1M, SGIGP1M.**
 (2) The back-up battery to be used is ACCSGB12.